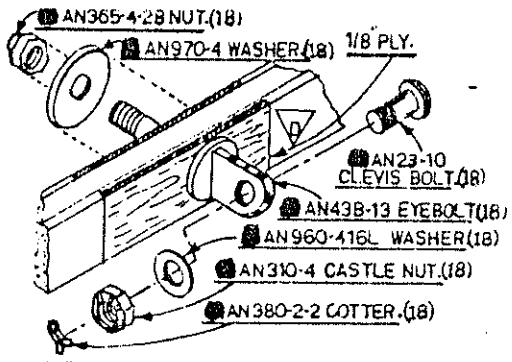

WHEN DRILLING FOR EYEBOLTS, MOVE OPPOSITE HOLE 1/8" SO THAT EYEBOLTS OVERLAP AT INSTALLATION.

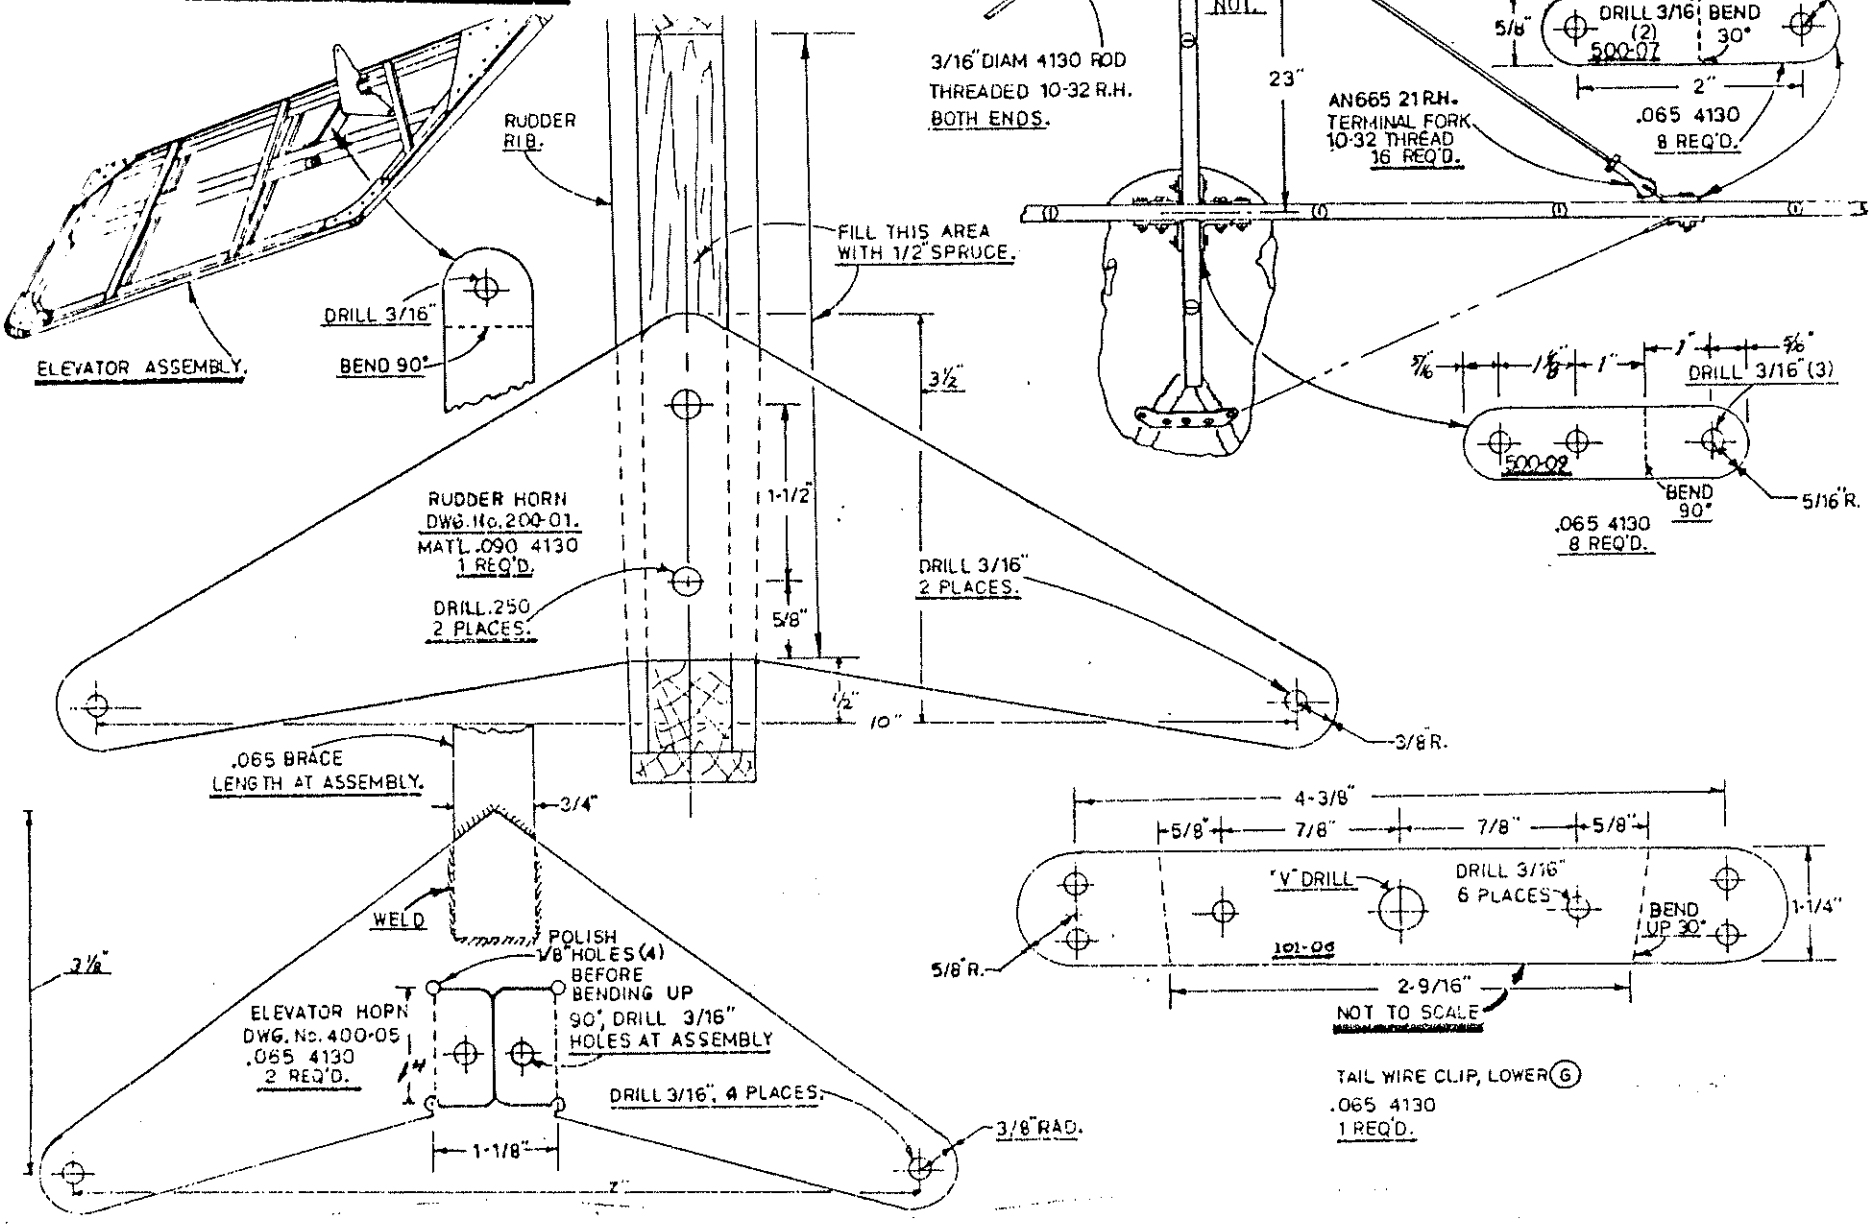

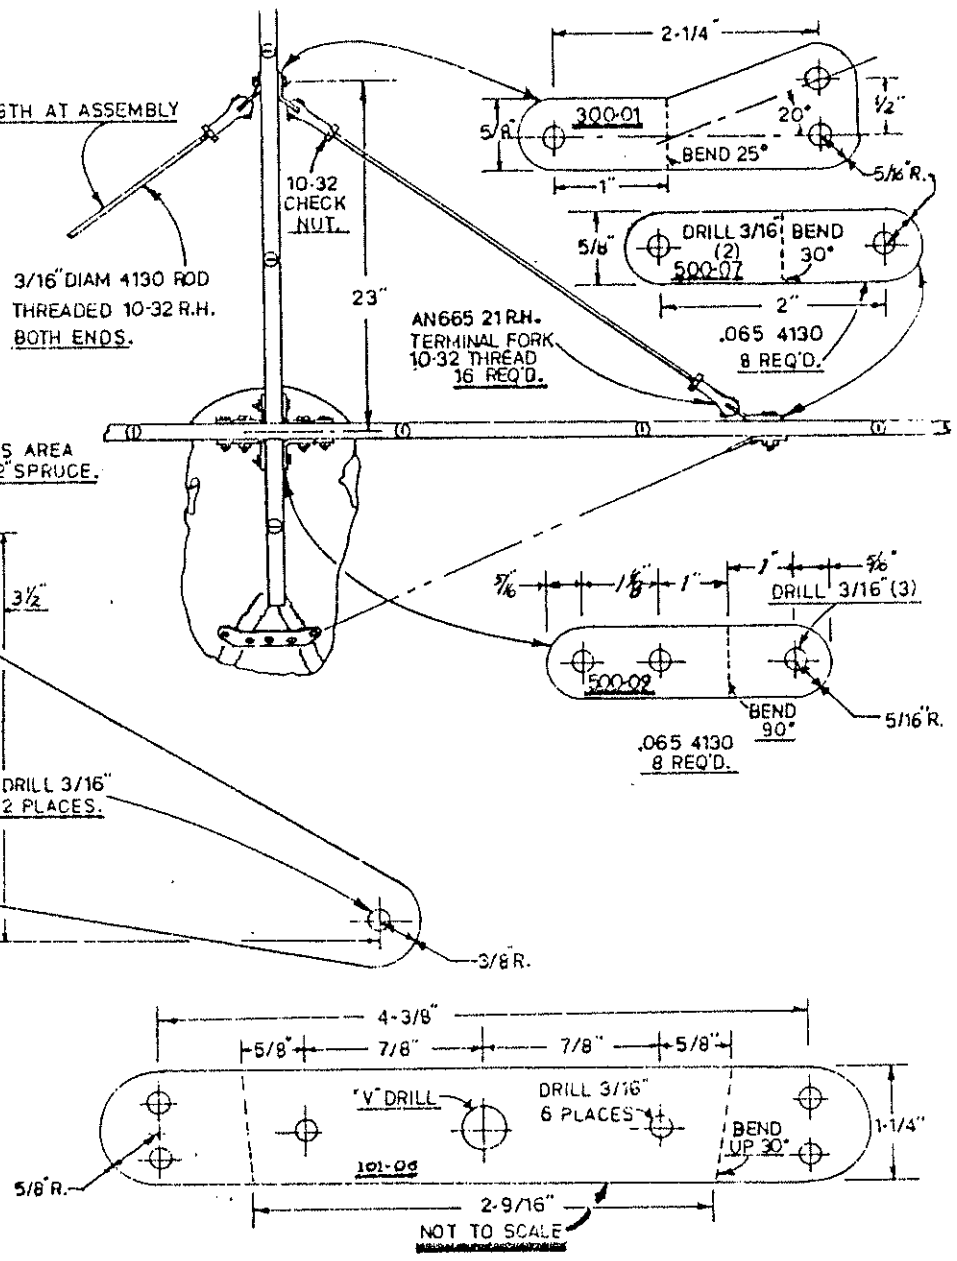

TAIL WIRE CLIP, LOWER (G)
.065 4130
1 REQ'D.

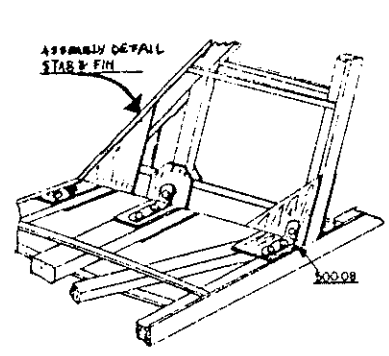

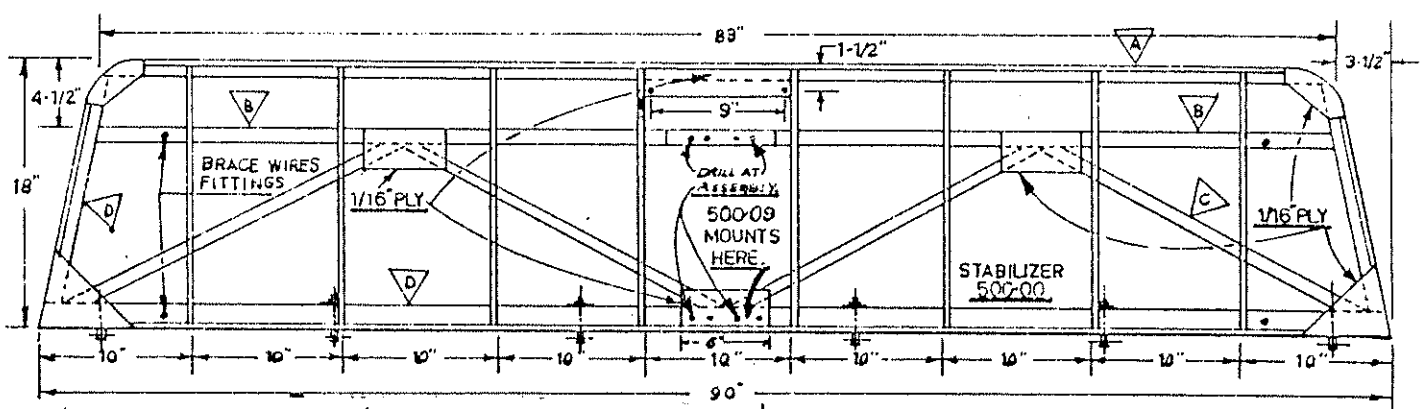

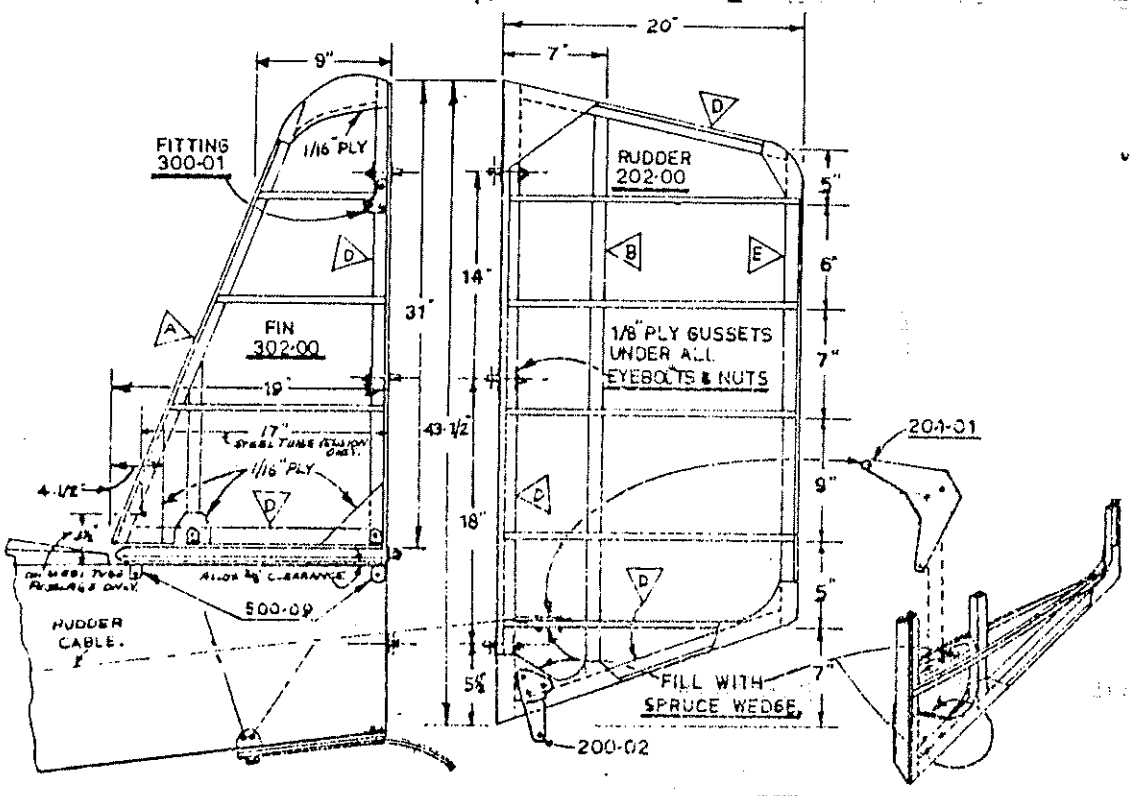

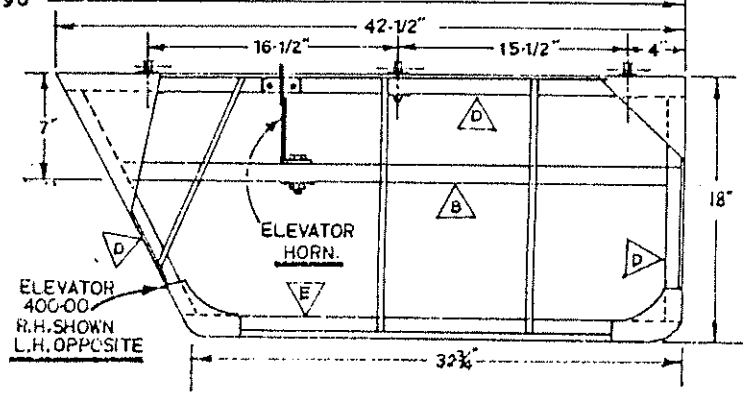

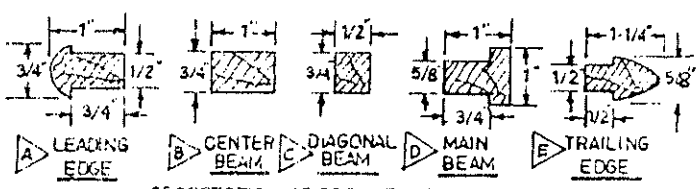

CROSSECTION OF SPRUCE MEMBERS IN TAIL SURFACES.

GN-1 AIRCAMPER
Tail Surfaces